



SINCE 1991

5VC™ 5V Crimp Roof Panel Machine



Versatile... Innovative... Dependable... Profitable

The High Performance Solution To Your 5V Crimp Needs.
Profiles In 21" and 24" Widths, Multiple Gauges
And Various Material Types.

STANDARD FEATURES:

- * New and Improved Polyurethane Drive Rollers
- * Hardened Stainless Steel Forming Roller System with Shear Dies
- * Quick Change Power Pac™, Gas or Electric
- * Power Interruption Safety Circuit
- * Panel Recognition Safety Photo Eye
- * Hydraulic Drive and Shear
- * Length Control Limit Switch
- * Push Button RUN/JOG Controls at Entry and Exit Ends
- * Welded Tubular Steel Frame

New Tech Machinery Corp. • 1300 40th St. • Denver CO 80205


PH: 303-294-0538 • Toll Free: 1-800-574-1717 • Fax: 303-294-9407 • Email: sales@newtechmachinery.com
www.newtechmachinery.com

OPTIONS

<p>TR12 12,000 IB. (5,500kg) Capacity NATM Compliant Tandem Axle Trailer, with Crane Lifting Eyes, Four-Drop Foot Stabilizing Jacks and Elec. Brakes with Breakaway Kit</p> <p>DR1 Machine Mounted Dual Overhead Reel Rack</p> <p>DR01-EX Expandable Arbor (16" to 20" I.D.) (400mm to 500mm)</p> <p>ROS1 Ten Ft. (3m) Sections of Variable Height Run Out Table</p>	<p>QCPP-E Quick Change Power Pac™ - Electric</p> <ul style="list-style-type: none"> * 7.5 Hp, 220 VAC, 60 Hz, 3Ph, 18 Amps * 5 Hp, 220VAC, 50 or 60 Hz, 1Ph, 30 Amps <p>QCPP-G Quick Change Power Pac™ - Gas</p> <ul style="list-style-type: none"> * 16 Hp Electric Start Engine <p>DRC08</p> <ul style="list-style-type: none"> * Computer - Batch / Length Control <p>FSD1 Single Free Standing Decoiler</p>
--	---

PROFILES - EZE CHANGE™

Hardened Stainless Steel forming rollers mounted on bars w/ shear dies included.

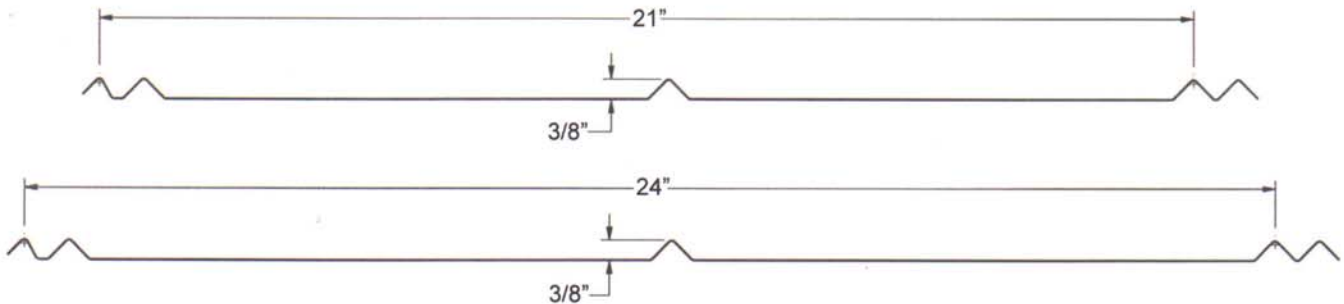

<p>5VC PANEL MACHINE</p> <p>Length 10'-5" (3.2m) Width 3'10" (1.2m) Height 4'3" (1.3m) w/ Over Head Rack 2'4" (.75m) w/o Over Head Rack Weight 2200 lbs. (1000kg)</p> <p>5VC ON TRAILER</p> <p>Length 17'6" (5.3m) Width 7' (2.1m) Height 6'3" (1.9m) with reel Weight 3800 lbs. (1700kg)</p> <p>SPEED</p> <p>60 ft/min (18m/min) Approx.</p>	<p>DRIVE Hydraulically Driven Polyurethane Rollers</p> <p>SHEAR Hydraulically Powered. Infinitely Adjustable Hardened Tool Steel Blades and Dies Panel Recognition Safety Photo Eye</p> <p>COIL WIDTH</p> <p>24" - (610mm) or 27" - (686mm) or 27-1/2" - (699mm)</p> <p>MATERIALS FORMED</p> <p>Painted Steel 30 ga. to 24 ga. (.3mm to .6mm) (painted, galvanized, aluminized) Painted Aluminum .019" to .040" (.5mm to 1.0mm) Copper 16 oz. to 20 oz. 3/4 Hard (.5mm to .7mm)</p>
---	--

- Limited three year parts / one year labor
- Limited lifetime separation on drive rollers
- Limited lifetime on stainless steel forming rollers



Run Out Table



Quick Change Power Pac™



Electronic Controller



Machine w/ Cover